




## PRODUCT SPECIFICATION – Hotel Telephone IP60DU

- Features:**
- DECT handset on DECT base station VOIP , SIP compatible.
  - Calls can be made and received from the base or the cordless handset. Up to 4 cordless handsets can be registered to each base.
  - Supports 1.8/1.9GHz, DECT6.0, WDCT standards.
  - Fast charging and low battery warning on cordless handset.
  - Mute, Flash, Speaker, Hold, Redial.
  - Redial deleted after ten minutes.
  - Adjustable earpiece / speaker volume / ringer volume.
  - Speakerphone
  - Easy web configuration
  - Desk or wall mountable.
  - Supports message waiting lamp key with retrieval function.
  - 8 Service buttons with icon.
  - Supports obtaining IP address via DHCP/Static IP.
  - Supports PCMU, G.723.1, G.729a/b, PCMA speech decoding algorithms.
  - Supports RFC2833, SIP INFO, and other DTMF transmission mode.
  - Support IEEE802.1 Q standard, IEEE802.3af protocol.
  - Support SIP protocol's standards
  - Supports upgrade through HTTP/TFTP protocol.
  - Adopts dynamic speech detection; Comfortable noise generation; Speech buffering technologies.
  - Integrated PoE power supply function for easy installation.

### CONTROLS AND FUNCTIONAL KEYS


#### Features Description of the functional keys

	Places the call on hold
	Microphone switch (handset)
	Flash button
	MWI – Message Waiting Indicator
	To lower or increase the speaker and handset volume
	Redial button / Page Handset
	For on hook dialling (speaker phone mode)
	Key for special services
	Key for special services

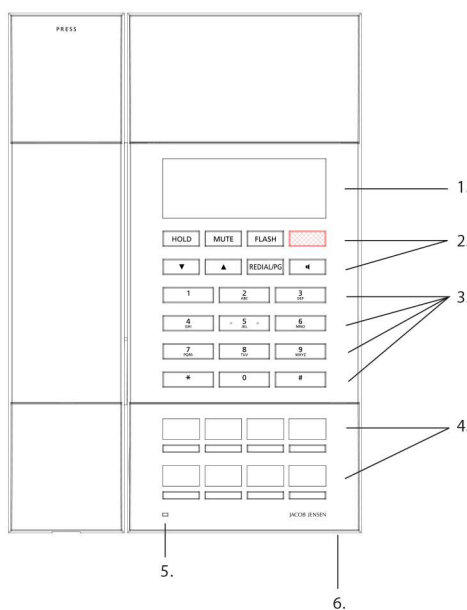

#### Base unit - front

1. Customer label area
2. 8 functional keys
3. 12 numerical keys
4. Service buttons
5. Indicator (LED) - for "Line in use (blue)" and "Mute (red)"
6. Hands-free microphone

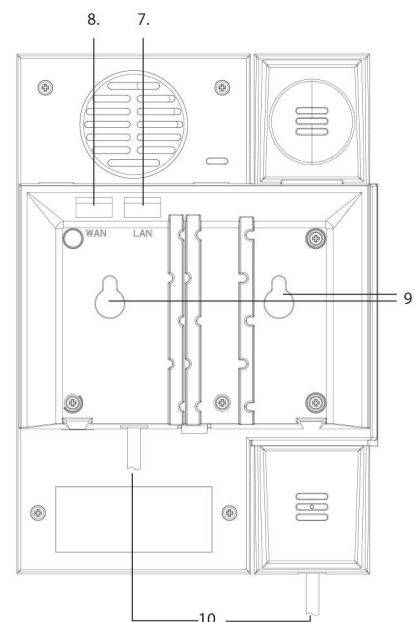

#### Base unit - rear

7. LAN port
8. WAN port
9. Holes for wall mounting

#### Colour Scheme - front plates



Material: ABS, PMMA.

Colours: Anthracite with silver coloured plates.

Approved standards: EN 55022 and EN 55024.